

Water Savings · High Performance · Reduced Costs



ZURN

EcoVantage™ Ultra Water Saving Urinal System

Zurn continues to demonstrate leadership in plumbing system innovation. The Z5798 ultra low consumption (1/8 gpf) urinal system is the latest product in that pioneering spirit. It leads the way with ultra low water consumption, latest in sensor technology, and high quality vitreous china.

Z5798 System Features

- High efficiency alternative to waterless urinals – optimized distribution plate and water trap pass all ASME A112.19.2 urinal performance tests.
- Ultra low water consumption – 85% water savings compared to a 1.0 gallon urinal.
- Conserves more than 30,000 gallons per year – fast payback calculations on retrofit.
- Easy to retrofit – in many cases urinal can be retrofitted to existing carrier and outlet rough-ins.
- Sensor flush valve with Smart technology – sanitary, hands-free operation.
- Battery operated – optimized electronics deliver 200,000 cycle or three year battery life.
- Zurn One System warranty – guaranteed paired performance from one manufacturer on the entire system.



Patent Pending

ZURN

ZURN PLUMBING PRODUCTS GROUP
COMMERCIAL FIXTURES OPERATION
2640 SOUTH WORK STREET
FALCONER, NY, U.S.A. 14733
PHONE: 716/665-1132
FAX: 716/665-1135
www.zurn.com




Zurn Engineered Water Solutions™

ZURN Z5798 EcoVantage™

High Efficiency Urinal System

1/8 Gallon of Water per Flush [0.5 LPF]

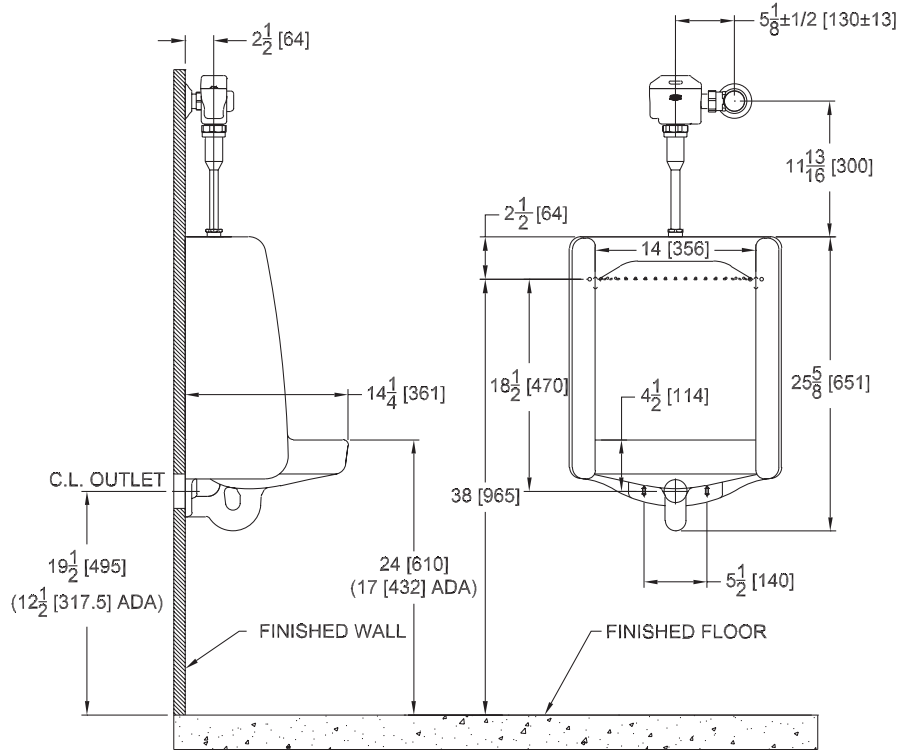

Engineering Specification: ZURN Z5798 EcoVantage™ 1/8 GPF [0.5 LPF] High Efficiency Urinal (HEU) System

System comes complete with exposed ZEG6003AV high efficiency flushometer valve and vitreous china urinal.

The system is designed to perform to industry standards with as little as 1/8 gallon per flush. Valve is operated by an infrared convergence-type proximity sensor with smart technology, powered by 4 "AA" batteries, furnished with vandal-resistant chrome-plated metal housing, chloramine resistant internal seals, and reversible cover. Valve features an internal flow regulator to maintain constant flow rates independent of line pressures and an in-line filter to protect the valve from debris within the water. Complete with high pressure vacuum breaker, one-piece hex coupling nut, adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has a vandal-resistant stop cap, sweat solder kit, and a cast wall flange with setscrew. Vitreous china urinal is 3/4" top spud with 2" outlet connection.



PATENT PENDING

Fixture dimensions meet ANSI/ASME standards A112.19.2M and CAN/CSA B45 requirements.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when urinal is installed 17" [432 mm] from finished floor.



ZURN INDUSTRIES, INC COMMERCIAL FIXTURES OPERATION
2640 SOUTH WORK STREET · FALCONER, NY 14733
PHONE: 716-665-1132 · FAX: 716-665-1135 · www.zurn.com

In Canada: **ZURN INDUSTRIES LIMITED**
3544 NASHUA DRIVE · MISSISSAUGA, ONTARIO L4V1 L2
PHONE: 905-405-8272 · FAX: 905-405-1292